



Yuasa Technisches Datenblatt

Yuasa YBX3054 - YBX3000 SMF Batterien

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	36Ah
Kaltstartstrom (A) EN1	330A

Abmessungen

Länge	187mm
Breite	127mm
Höhe	227mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	9.3kg
--	-------



Gehäuseeigenschaften

Gehäusotyp	JIS B19
Batteriehälter	N
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Deckeltyp	SMF doppelwandige Deckelkonstruktion


Technologie

Flammschutz	✓
Technologie	Ca/Ca
Adskiller	PE
VDA Überschlagentest	✓
Empfohlener Ladestrom	2A
Performance Marking	W3-C2-V2-E1


Anschlusspol Typ

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Zellenanordnung

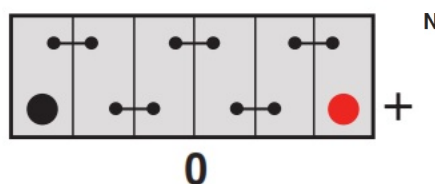

Batteriehälter



Datenblatt erstellt am 16/12/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3054 - YBX3000 SMF Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	36Ah
Cold Cranking Amps (EN1)	330A

Dimensions

Length	187mm
Width	127mm
Height	227mm

Weights & Measures

Mean Weight with Acid	9.3kg
-----------------------	-------



Container Features

Case Type	JIS B19
Hold Down	N
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	2A
Performance Marking	W3-C2-V2-E1


Terminal Type

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Cell Assembly Layout

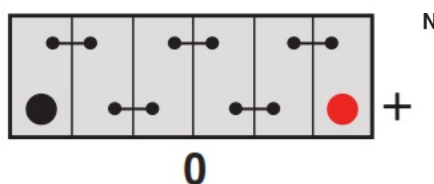

Battery Hold-down



Data Sheet generated on 16/12/2024 – E&OE